

# Perfil Americano Doble "T" Standard IPA


F= Sección

G= Peso

J= Momento de inercia

W= Momento resistente

i= Radio de giro

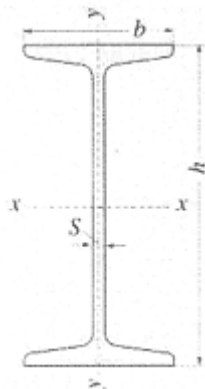

Denominación	Dimensiones								Eje flexión x-x			Eje flexión y-y		
	Pulgadas			Milímetros			F	G	$J_x$	$W_x$	$i_x$	$J_y$	$W_y$	$i_y$
	h	b	s	h	b	s	cm <sup>2</sup>	Kg./m	cm <sup>4</sup>	cm <sup>3</sup>	cm	cm <sup>4</sup>	cm <sup>3</sup>	cm
3"	3	2.330	0.170	76.2	59.2	4.3	10.80	8.50	105.1	27.6	3.12	18.9	6.41	1.33
4"	4	2.663	0.193	101.6	67.6	4.9	14.50	11.50	252	49.7	4.17	31.7	9.40	1.48
5"	5	3.002	0.214	127.0	76.3	5.4	18.80	15.00	511	80.4	5.21	50.2	13.20	1.63
6"	6	3.332	0.232	152.4	84.6	5.9	23.60	18.60	919	120.6	6.24	75.7	17.90	1.79
7"	7	3.663	0.250	177.8	93.0	6.4	28.60	22.80	1,507	170.4	7.26	112.4	24.60	1.98
8"	8	4.001	0.271	203.2	101.6	6.9	34.80	27.40	2,400	236	8.30	155	30.50	2.11
10"	10	4.661	0.311	254.0	118.4	7.9	48.10	37.80	5,140	405	10.30	282	47.70	2.42
12"	12	5.251	0.462	304.8	133.4	11.7	77.40	60.70	11,330	748	12.10	563	84.50	2.70