


Perfil "U" Americano standard - UPA

- F= Sección
- G= Peso
- J= Momento de inercia
- U= Superficie exterior por metro de perfil
- W= Momento resistente
- i= Radio de giro

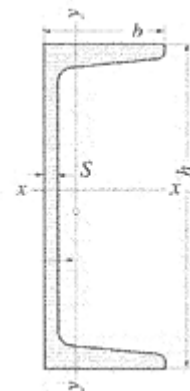

Denominación	Dimensiones en mm								Eje flexión x-x			Eje flexión y-y		
						F	G	U	J _x	W _x	i _x	J _y	W _y	i _y
	h	b	s	t	r	cm ²	Kg./m	m ² /m	cm ⁴	cm ³	cm	cm ⁴	cm ³	cm
3"	3	1.410	0.170	76	35	4.3	7.8	6.1	68.9	18.1	2.98	8.2	3.32	1.03
4"	4	1.584	0.184	102	40	4.7	10.3	8.0	159.5	31.4	3.97	13.1	4.61	1.14
5"	5	1.750	0.190	127	44	4.8	12.7	10.4	308	49.2	4.97	20.0	6.20	1.27
6"	6	1.920	0.200	152	48	5.1	15.5	12.2	546	71.7	5.94	28.8	8.16	1.36
7"	7	2.090	0.210	178	53	5.3	18.5	14.6	878	98.3	6.91	40.8	10.3	1.37
8"	8	2.260	0.220	203	57	5.6	21.8	17.1	1,356	133	7.89	59.4	12.8	1.59
10"	10	2.739	0.379	254	69	9.6	37.9	30.0	3,290	259	9.31	117	21.6	1.76
12"	12	2.942	0.282	305	74	7.2	39.3	30.8	5,370	352	11.70	161	28.3	2.03